

SmartLight™ Flexible LED Wash Lighting

DPI1246 Easy Install Flexible LED Wash Lighting



LED Lighting



DPI1246 LED Wash Lighting System

- » Zero Lead Time
- » Simple Installation - Measure, Cut, Terminate
- » High-Quality Aerospace-Grade LEDs
- » Adjustable of Fixed Color Temp Options
- » New or Retrofit Installations
- » 50,000 Hour Life
- » Low Power, Low Heat, Slim Compact Design

Simply the Easiest High-Quality LED Wash Lighting System Installation in the Aerospace Industry.

Increase your profit margin with the zero-lead time, easy-to-install DPI1246 LED Wash lighting system featuring high-quality aerospace-grade LEDs and a wide range of color options.

Unlike other aluminum strip LED wash lighting systems where custom lengths need to be manufactured, thus increasing cost and lead-time, the DPI1246 wash lighting has zero lead-time and can be installed in a matter of hours, not days. Simply measure, cut and terminate and these LED lights are good to go.

DPI1246 LEDs have a host of color options to choose from including preset full color RGBW ranging from 3,200K to 6,200K, adjustable RGBW (2,700K - 6,000K), full color RGB, and warm, neutral and cool whites. The DPI1246 is also available in individual colors such as red, green, blue and amber.

Whether it's a new installation or replacing legacy fluorescent wash lighting, the DPI1246 LED wash lighting system combines high-quality with low labor time to dramatically increase MRO's profit margins.

DPI Labs' line of SmartLight™ LED fixtures are purposely designed for each unique type of application providing wash, overhead, reading, area, mood and accent for optimal balance of performance, weight, size, reliability, and energy efficiency.



General Specifications

Electrical


Input Voltage (VDC) 11.2 VDC

Input Power 3.6 W per Foot


Physical

Sizes Full Roll 16'
Half Roll 8'
Custom Lengths Available

Dimensions .21" H x .57" W x L

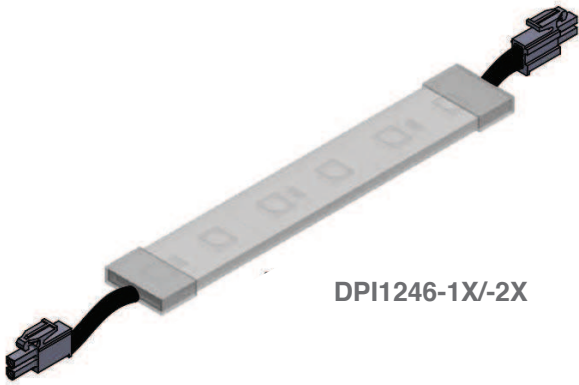

DPI1246-1X/-2X

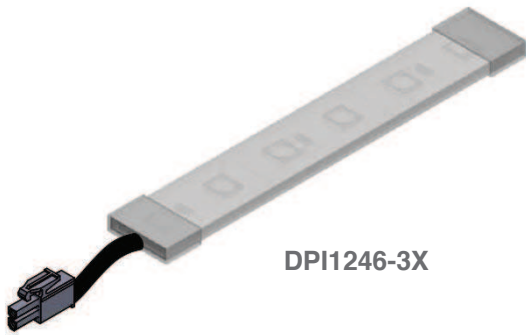

DPI1246-3X

Part Number Guide DPI1246-XX-XXX

DPI1246 - XX-XXX



Length	Color	Special Option
1: Full Roll (16')	A: Neutral White (4,200K)	RESERVED 036: 36" (±3")
2: Half Roll (8')	B: Warm White (3,000K)	
3: Custom Length	C: Cool White (6,200K)	
	D: Full Color RGBW (3,200K)	
	E: Full Color RGBW (3,200K)	
	F: Full Color RGBW (3,200K)	
	G: Full Color RGB	
	H: Adjustable Color Temp White (2,700K - 6,000K)	
	J: Blue	
K: Red		
L: Green		
M: Amber		

About DPI Lab's SmartLink™ Cabin Management System



SmartLink™ is the industry's most advanced system architecture for integrated cabin management of aircraft cabin lighting, audio/visual components, entertainment systems, and comfort control. Based on an RS-485 / C-Can data bus, SmartLink offers incomparable performance and flexibility for the particular requirements of private, business, commercial military and VVIP aircraft.



For Sales, Product Support, or Dealership inquiries, please call **909.392.5777** to speak with a **DPI** Representative.

➤ Visit us at dpilabs.com